

LED Flexible Flat Strip Light


Features for SFS30C strip in pin connection

1. Different LED colors can be linked together.
2. Standard size for strip at length 30 cm, width 10 mm.
3. Flat strip easy for installation.
4. Scissor mark to be cut off if necessary.
5. Water resistance IP64.
6. DIY decoration lighting for room, garden, sign board, motorcycle....etc.

How to order:

SFS30*10C□-12□-□

- Color of strip
- Color of LED light
- LED counts
- Chip type of LED
- Pin connection
- Width of strip (unit: mm)
- Length of strip (unit: cm)

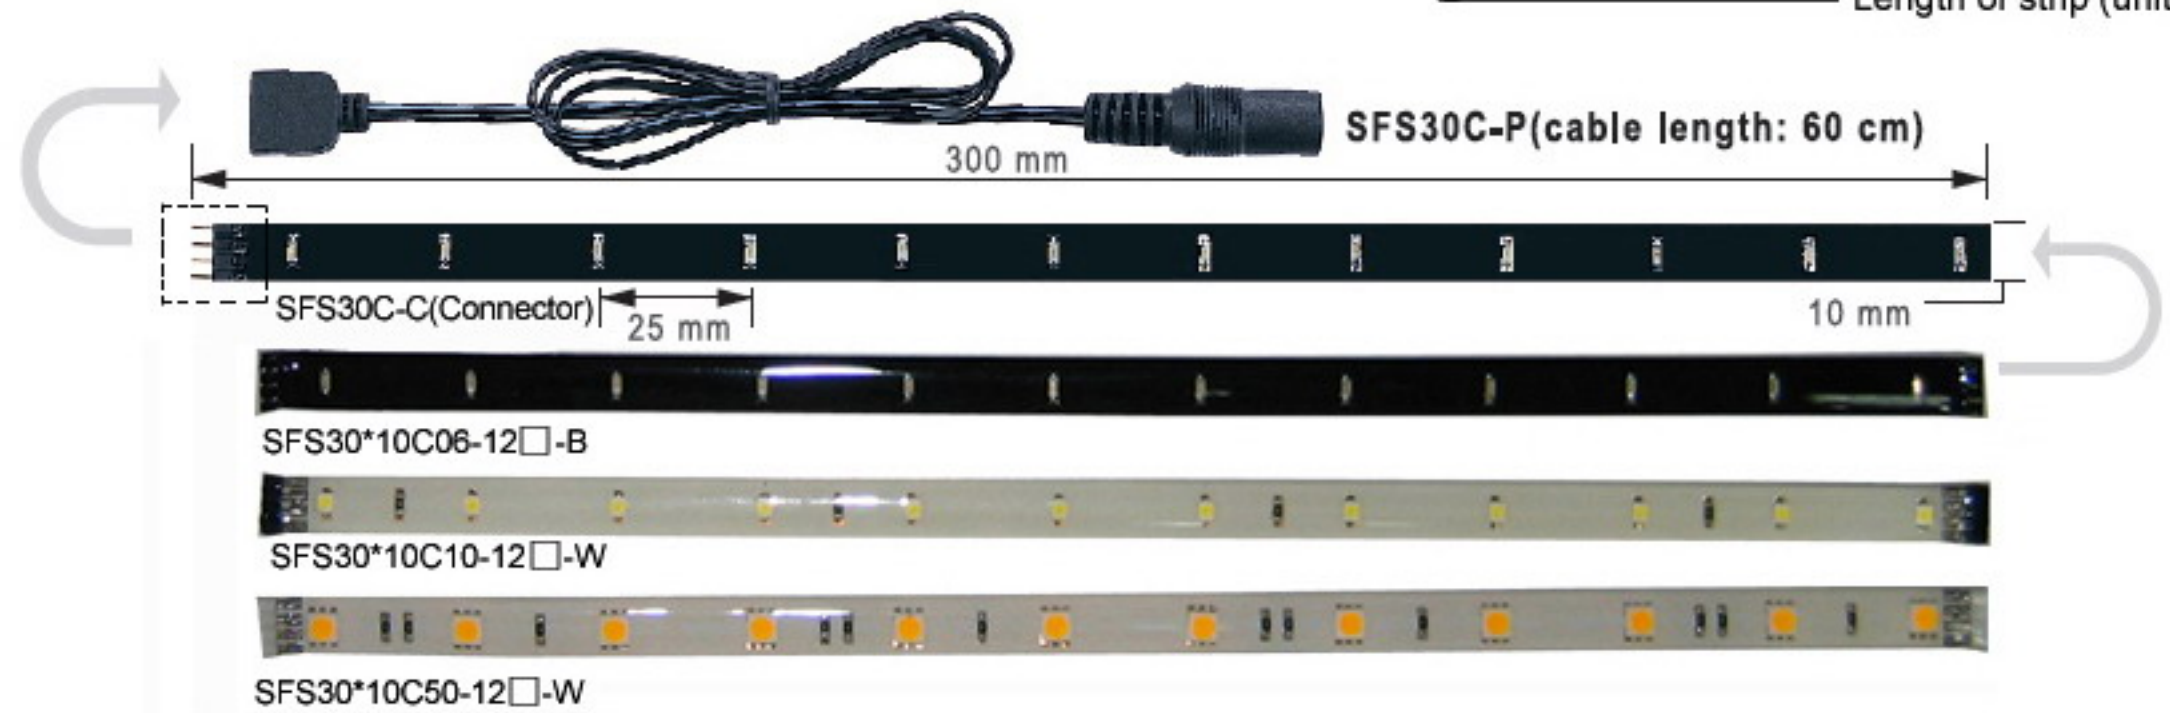

Electric Specification:

Model No.	SFS30*10C06-12 □	SFS30*10C10-12 □	SFS30*10C50-12 □
LED Chip	1206	1210	5050
Current (max.)	75 mA	100 mA	240 mA
Power Consumption	1 W	1.2 W	2.9 W
Voltage	DC 12V±1.5V		

Optical Specification:

Model No.	Single LED Intensity (Unit:mcd)					
	Warm White	White	Green	Blue	Red	Yellow
SFS30*10C06-12□		300	230	120	100	100
SFS30*10C10-12□	1200	1500	1000	500	600	600
SFS30*10C50-12□	4000	4500	3000	800	1500	1500

View Angle: 120° ± 10°

Numbers of Strip Connection:

Model No.	SFS30*10C06-12 □	SFS30*10C10-12 □	SFS30*10C50-12 □
Adaptor-2A	20	16	8
Adaptor-3A	30	24	12
Adaptor-5A	—	—	20

Remark:

1. Scissor mark on the back of strip.
2. Operating Temperature : -10°C ~ +60°C.
3. Storage Temperature : -15°C ~ +85°C.
4. The bending angle for SFS Flexible strip ≥ 60°.
5. ODM requirement is welcome subject to minimum quantities 1,000 meters.

